



**KDC 47**



**KDC 67**

# Dipping Cabinets

## KDC Series

Kelvinator is the most trusted design for ice cream dipping cabinets for over 75 years.

The Kelvinator product line features both straight and curved glass models in 4-can, 8-can, 12-can and 16-can models from which you can choose.



## FEATURES:

- New refrigerant/compressor design
- Microprocessor controller with LED digital display
- Straight or curved glass front
- Stainless-steel top service area
- Slide-out condensing unit for easy maintenance and serviceability
- Forced-air/bare tube condensor, static/cold-wall evaporator
- Temperature range +10°F to -15°F
- Additional storage capacity underneath product display level

- Energy Star compliant
- Durable powder-coat paint finish interior and exterior
- Supplied with 8-foot 15A power cord with NEMA 5-15 plug

## OPTIONAL ACCESSORIES:

- Can skirt kits
- Caster kits
- Dipperwell
- Gelato pan racks (pans not included)
- Frost shield kits
- Night cover kits

formerly  
**Kelvinator** 

Project:

Quantity:

Item#:

Model Specified:

Approval: \_\_\_\_\_

# KDC Ice Cream Dipping Cabinets

**TECHNICAL DATA**


MODEL	KDC27	KDC47	KDC67	KDC87
<b>Temp Range</b>	+10°F to -15°F	+10°F to -15°F	+10°F to -15°F	+10°F to -15°F
<b>Exterior Dimensions</b>				
Length	25.75	46.5"	67"	88"
Depth	26.75	26.75"	26.75"	26.75"
Height	50.56	50.56"	50.56"	50.56"
<b>Capacity</b>	5.0 cu. ft.	12.0 cu. ft.	19.1 cu. ft.	26.4 cu. ft.
<b>Capacity (3-gal. tubs)</b>	4	12	20	28
<b>Facings (3-gal. tubs)</b>	4	8	12	16
<b>Storage (3-gal. tubs)</b>	0	4	8	12
<b>Compressor</b>	Hermetic	Hermetic	Hermetic	Hermetic
<b>Shipping Weight</b>	lbs.	365 lbs.	525 lbs.	635 lbs.
<b>Condensor Type</b>	Bare Tube	Bare Tube	Bare Tube	Bare Tube
<b>Lighting</b>	LED	LED	LED	LED
<b>Electrical</b>	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P
<b>Rated Amps</b>	11.0	11.5	12.0	12.0

**SPECIFICATIONS**

Item: \_\_\_\_\_  
KDC \_\_\_\_\_

Furnish ( ) quantity, Kelvinator Ice Cream Dipping Cabinets, Kelvinator model \_\_\_\_\_, KDC \_\_\_\_\_. The unit construction shall consist of a 20-ga. white powder-coat finished galvanized steel interior and exterior, foamed in place. The unit will be supplied with service-side lid and a stainless-steel top service area.

Cabinet as specified to use R-404a refrigerant. Refrigeration control shall be thermostatic control with a temperature range of +10°F to -15°F. Cabinet to have independent on/off switch for compressor and light switch to be mounted in the shell of the cabinet and to be furnished with a drain connection. Cabinet to be provided as a rear-air intake and front-air discharge (consult factory for rear-air intake and discharge).

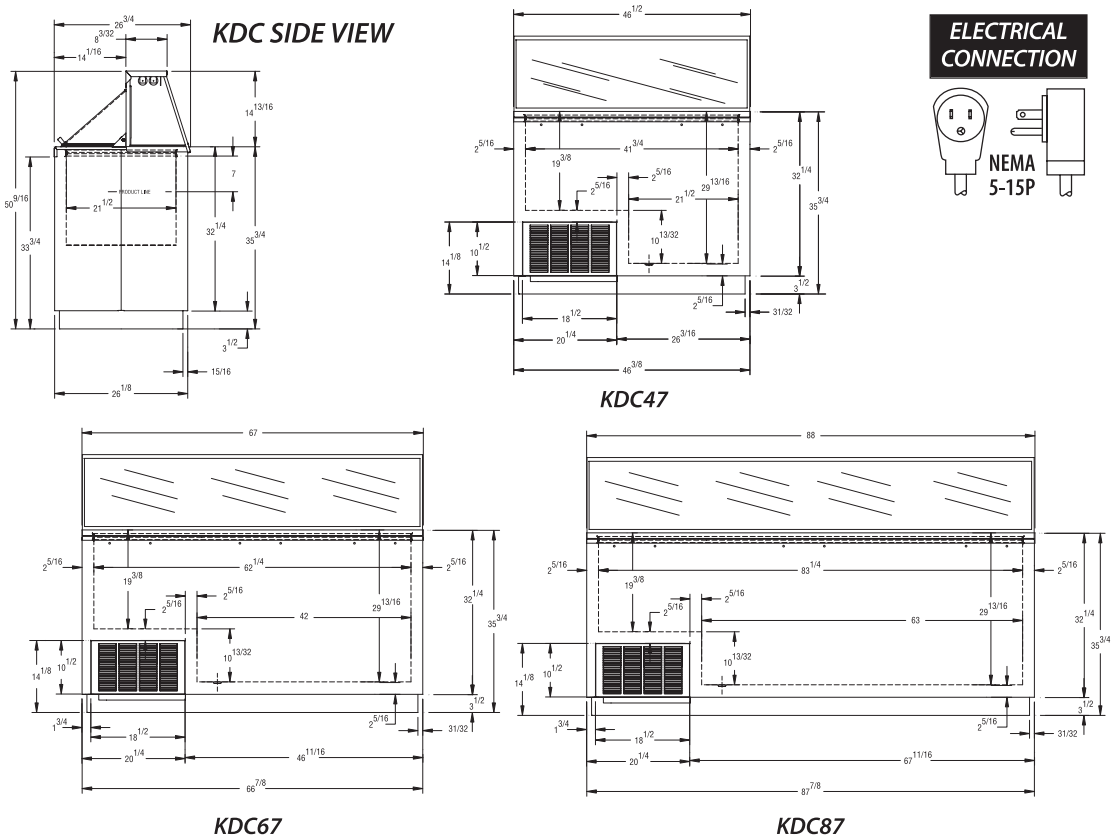

Global Refrigeration, Inc., reserves the right to change specifications, terms, and prices without notice.

5855 Grant Avenue, Cleveland, OH 44105

888.650.9799

www.globalref.com

EMG1112-100