



T30 LSP



T50 LSP



T80 LSP

## Solid-Door Reach-In Freezers

Global solid-door reach-in freezers are unsurpassed in convenience, performance and reliability.

Cabinets are available in one-, two-, and three-door models to fit most common applications. Cantilever shelves are epoxy coated for durability and can easily be adjusted. Hinges are self-closing or can be set to hold door open while loading.

Top mount condensing unit means unobstructed air flow and easier servicing. Extra large face area on condenser provides more efficient energy consumption and reduces cleaning and maintenance.



### FEATURES:

- Microprocessor digital temperature and programmable defrost controller with LED digital display
- CRO and TXV valves
- Heated perimeter and mullions
- Dual fans and extended evaporator surface increase performance and efficiency
- Solid painted foam-filled doors
- Self-contained top-mount compressor

- Auto door switch technology
- Energy Star compliant
- Refrigerant R-404a
- Temperature range 0°F to -20°F

### OPTIONS:

- Caster kit
- Additional cantilever shelves

formerly  
**Kelvinator** 

Project:

Quantity:

Item#:

Model Specified:

Approval: \_\_\_\_\_


# Solid-Door Reach-In Freezers

## TECHNICAL DATA

MODEL	T30LSP	T50LSP	T80LSP
<b>Temp Range</b>	0°F to -20°F	0°F to -20°F	0°F to -20°F
<b>Exterior Dimensions</b>			
Length	31"	52"	78"
Depth	36.88"	36.88"	36.88"
Height	83.75"	83.75"	83.75"
<b>Interior Dimensions</b>			
Length	26 1/4"	47 1/4"	73 1/4"
Depth	29 5/8"	29 5/8"	29 5/8"
Height	60 5/8"	60 5/8"	60 5/8"
<b>Number of Doors</b>	1	2	3
<b>Door Construction</b>	Foam-in-place urethane	Foam-in-place urethane	Foam-in-place urethane
<b>Hinge Type</b>	Spring-loaded, cam	Spring-loaded, cam	Spring-loaded, cam
<b>Number of Shelves</b>	4+1 bottom rack	8+1 bottom rack	12+1 bottom rack
<b>Shelf Type</b>	Cantilever, Epoxy Coated Steel Wire	Cantilever, Epoxy Coated Steel Wire	Cantilever, Epoxy Coated Steel Wire
<b>Insulation</b>	Foam-in-place urethane	Foam-in-place urethane	Foam-in-place urethane
<b>Wall Thickness</b>	2 3/8"	2 3/8"	2 3/8"
<b>Capacity (cu. ft.)</b>	27.3	49.1	76.2
<b>Capacity (1/2-gal. pkg.)</b>	161	324	486
<b>Shipping Weight</b>	465 lbs.	755 lbs.	900 lbs.
<b>Amp Draw</b>	10.5	11.0	11.0
<b>Electrical</b>	115/60/1	208-230/115V	208-230/115V
<b>Interior Finish</b>	High-quality Powder-coat Finish on Galvanized Steel		
<b>Electrical Information</b>	NEMA 5-15P	NEMA 20P	NEMA 20P

## SPECIFICATIONS

### Electrical Connections




### T50 LGP & T80 LGP



NEMA L14-20P

### SIDE VIEW

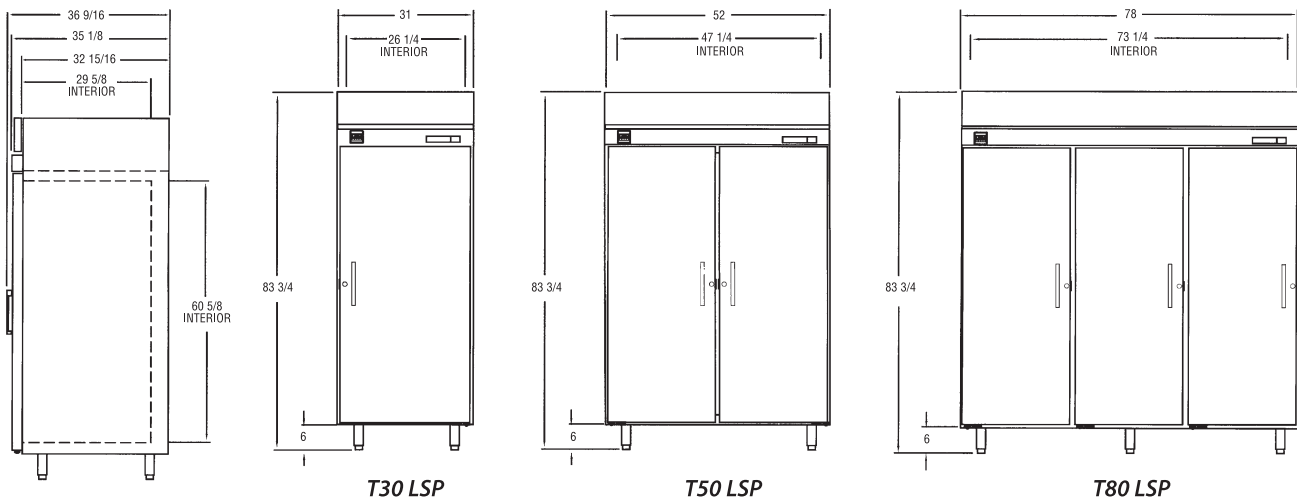

Global Refrigeration, Inc., reserves the right to change specifications, terms, and prices without notice.

**Global Refrigeration, Inc.**

5855 Grant Avenue, Cleveland, OH 44105

888.650.9799

www.globalref.com