



# Gelmatic 30 M

batch-freezer  
for gelato & ice cream production with cold process  
air cooled



Easy & fast

High performance batch-freezer that allows to obtain results above market standards.  
Easy to use, strong and reliable, it makes artisan's work easy and safe,  
as it reaches very low temperature in a very short time.

## Technical features

- Dual Mode System, for gelato and premium Ice-cream production
- Charging hopper allows for a fast charge of the mix, flavors and other ingredients
- Front door made in Makrolon® (special thermal insulating material)
- Quick and easy gelato extraction
- Acoustic signal tells you when gelato is ready
- Automatic temperature control thanks to advanced thermoregulators with "sensible touch" displays
- Dedicated program for premium ice cream production
- Cylinder type: patented stainless steel "multi-point" injection system
- Refrigeration system: patented stainless steel plate condenser
- Three blade stainless steel mixer with interchangeable scrapers
- Two-speed mixer
- Probe in direct contact with the mix

## Advantages and strengths



- Gelato or ice cream batches produced in a very short time
- Easy to use, the machine is exceptionally functional
- Electronic control of working cycle through temperatures
- Extremely easy to handle and clean
- Short freezing time



# Gelmatic 30 M

batch-freezer  
for gelato & ice cream production  
with cold process  
air cooled

Model: .....  
Quantity: .....  
Project: .....  
Company: .....  
Contact: .....  
Dealer ID: .....

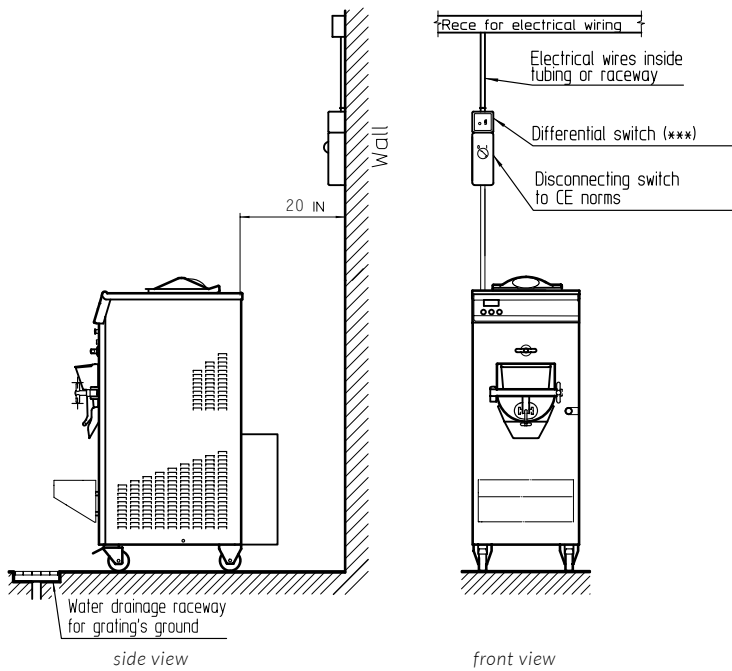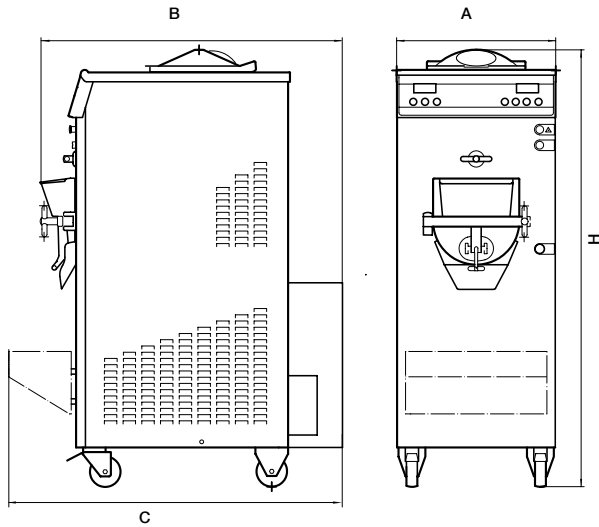

(\*\*) 30 mA (ABB serie C).



Warranty: valid for the North American Continent (Canada, USA)  
Extension: 12 months parts (with check list and warranty signed and mailed)  
5 years compressor with registration on [warranty.bravonorthamerica.com](http://warranty.bravonorthamerica.com)

Width (A)	cm	51	inches	20,1
Depth (B)	cm	97	inches	38,2
Depth with base (C)	cm	103,5	inches	40,7
Height (H)	cm	140	inches	55,1
Weight	kg	240	lbs	529
Frame type	floor model			
Outer panels	stainless steel			
Capacity per cycle	Liters	5	Gal	1,32
Max. hourly production	Liters	38	Gal	10
Min. mix per cycle	Kg	2	Lbs	4,4
Max. mix per cycle	Kg	4	Lbs	8,8
Volume cylinder with mixer	Liters	8,93	Quarts	9,43
Volume cylinder without mixer	Liters	9,46	Quarts	10
Min. mixer speed	RPM 122			
Max. mixer speed	RPM 250			
Max power	kw	2,8	Hp	3,7
Voltage	230 Volt / 60 Hz / 3 phase			
Running Amps	Amp 12,5			
Breaker size	Amp 25			
Drive motor	kw	2,2 - 1,5	Hp	3 - 2
Compressor power	kw	1,3	Hp	1,75
Compressor power	BTU/h 4094			
Freon R404A	Gr	2100	Oz	74,1
Refrigeration condensation	Air			
Crate dimensions	cm	109x69x172	inches	42,9x27,1x67,7
Crate weight	kg	330	lbs	727



Bravo North America Inc. Office & Showroom, 810 Tyvola Road, Suite 130, Charlotte, NC 28217  
tel. +1 980 237 2474 [bravonorthamerica.com](http://bravonorthamerica.com) [info@bravonorthamerica.com](mailto:info@bravonorthamerica.com)