

# 8756

## Soft Serve Freezer

Twin Twist, Pump

### Features

Offer all the popular soft serve variations from low or non-fat ice creams to custards, yogurt and sorbet. Serve two separate soft serve flavors, or an equal combination of both in a twist.

### Freezing Cylinder

Two, 3.4 quart (3.2 liter).

### Refrigerated Mix Storage Cabinet

Lower front mix cabinet is independently refrigerated to maintain mix below 41°F (5°C). Door is hinged on the right. Two, 9 gallon (34.1 liter) mix tanks. Two air/mix pumps deliver the precise amount of air and mix to the freezing cylinder.

### Indicator Lights

Mix Low light alerts the operator to add mix. When the Mix Out light flashes, the unit shuts down automatically to prevent damage.

### Electronic Controls

Finished product quality is monitored by Softech™ controls that measure viscosity.

### Two Locking Casters


Front casters have a locking feature for operators to lock to maintain equipment in place. The locking casters can be released to move the equipment for cleaning.

### Door Interlock System

Protects the operator from injury as the beater will not operate without the dispensing door in place.



# 8756 Soft Serve Freezer

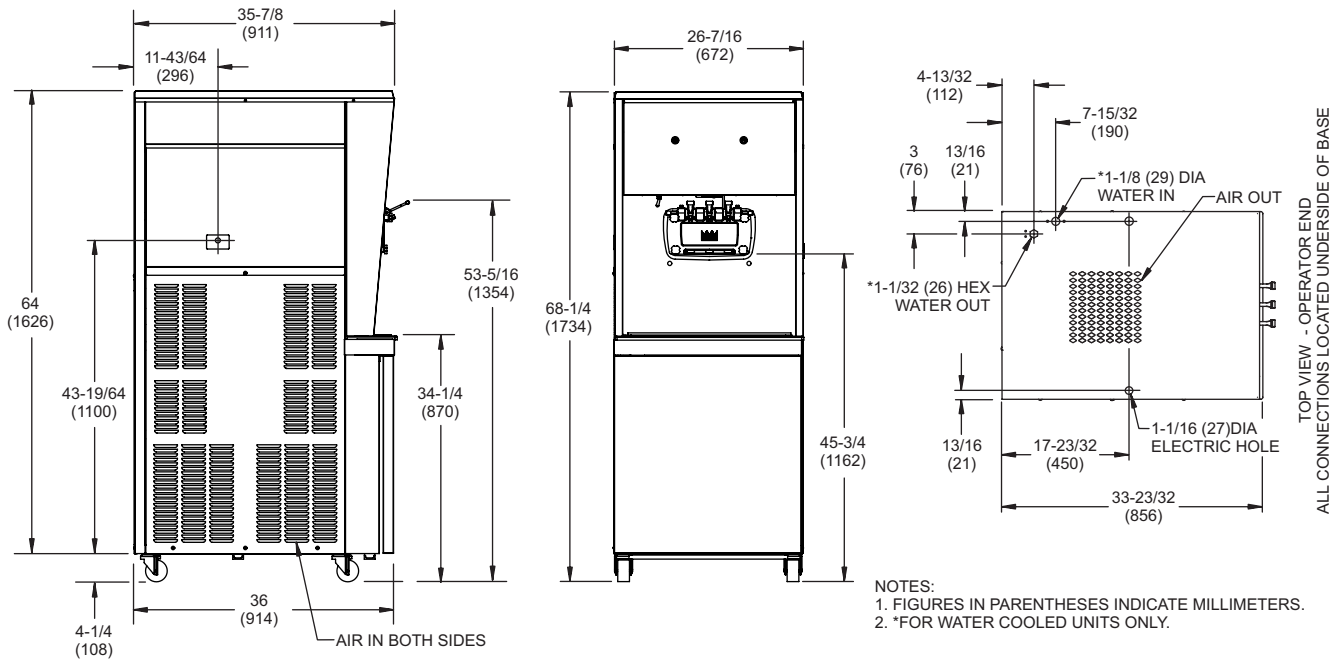

| Weights         | lbs.    | kgs.   |
|-----------------|---------|--------|
| Net             | 810     | 367.4  |
| Crated          | 849     | 385.1  |
|                 | cu. ft. | cu. m. |
| Volume          | 77.9    | 2.2    |
| Dimensions      | in.     | mm.    |
| Width           | 26-7/16 | 672    |
| Depth           | 36      | 914    |
| Height          | 68-1/4  | 1734   |
| Floor Clearance | 4-1/4   | 108    |

\*Mounted on standard casters

| Electrical         | Maximum Fuse Size |       | Minimum Circuit Ampacity |       | Poles (P) Wires (W) |
|--------------------|-------------------|-------|--------------------------|-------|---------------------|
|                    | Left              | Right | Left                     | Right |                     |
| 208-230/60/1 Air   | 35                | 35    | 28                       | 24    | 2P 3W               |
| 208-230/60/1 Water | 35                | 35    | 28                       | 24    | 2P 3W               |
| 208-230/60/3 Air   | 25                | 25    | 22                       | 18    | 3P 4W               |
| 208-230/60/3 Water | 25                | 25    | 21                       | 18    | 3P 4W               |
| 220-240/50/1 Air   | 30                | 25    | 23                       | 19    | 2P 3W               |
| 380-415/50/3N~ Air | 12                | 9     | 11                       | 8     | 4P 5W               |

This unit may be manufactured in other electrical characteristics. Refer to the local Taylor Distributor for availability.

(For exact electrical information, always refer to the data label of the unit.)

## Bidding Specs

Electrical: Volt \_\_\_\_\_ Hz \_\_\_\_\_ ph \_\_\_\_\_  
Neutral: Yes No Cooling: Air Water NA

Options: \_\_\_\_\_

## Specifications

### Electrical

Two dedicated electrical connections are required. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord & receptacle specifications as local codes allow.

### Beater Motor

Two, 1.5 HP.

### Refrigeration System

Two, 9,500 BTU/hr. R404A

Mix Cabinet, 1,100 BTU/hr. R404A.

(BTUs may vary depending on compressor used.)

### Air Cooled

Minimum 3" (76 mm) around all sides and 12" (305 mm) on top. Minimum air clearances must be met to assure adequate air flow for optimum performance.

### Water Cooled

Water inlet and drain connections under side of base 1/2" FPT.

## Options

- Cone Dispenser
- Draw Valve Lock Kit
- Panel Spinner
- Sneeze Guard
- Syrup Rail Kit (side mount)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.



Taylor Company,  
Rockton, Illinois 61072  
815-624-8333 800-255-0626 Fax 815-624-8000  
www.taylor-company.com

026173-ADV 11/11