



**Middleby
Marshall®**

X55 Gas Conveyor Oven



Conveyor Width
32"



Cooking Chamber
55"



STANDARD FEATURES

- 55" (1397 mm) long cooking chamber
- Patented "Jet Sweep" impingement process delivers constant heat to the chamber
- IoT compatible with Open Kitchen (ConnectWare required)
- Reversible conveyor belt provides automatic delivery when product is finished
- Front-loading window with cool handle design allows products with different bake times to be cooked consistently regardless of loading
- Removable parts for easy cleaning (crumb pans, end panels, air fingers, and a folding conveyor belt assembly)
- Stackable up to three high
- One-year parts and labor warranty – includes oven start-up and demonstration (U.S. only)

OPTIONAL FEATURES

- Compatible with Halton hood
- Split belt available upon request
- Hearth belt available

PRINCIPLE

Middleby Marshall X-Series conveyors utilize impingement oven technology that uses jets of hot air directed at the product from both above and below to achieve rapid and uniform cooking. Patented vertical columns of hot air move heat aerodynamically instead of using high temperatures. This high-speed airflow ensures consistent internal and external heating, reducing cook times while enhancing product quality, texture, and moisture retention. Our impingement oven is engineered for precise temperature and airflow control, making it ideal for high-throughput applications.

ENERGY MANAGEMENT SYSTEM

- Patented EMS provides efficient heat transfer to and from the product
- Efficient heat transfer combined with streams of hot air means these ovens can cook a multitude of products in a fraction of the time
- The front of the oven is insulated so it is cool to the touch with removable front panel in place

CERTIFICATIONS



Middleby Marshall reserves the right to make substitutions of components or change specifications without prior notice.

DOC-1022/Revision G/May 2025

GENERAL SPECIFICATIONS


Wall Clearance

Rear of Conveyor to Wall	4"	102 mm
Control End to Wall	6"	152 mm
Non-control End to Wall	6"	152 mm
Bake Operating Temperature	300°F-600°F	149°C-315°C
Time Range	1-19 minutes	


DIMENSIONS

Single Units


Heating Zone	55"	1397 mm
Baking Area	12.2 ft ²	1.1 m ²
Belt Length	90.77"	2306 mm
Belt Width	31.5"	800 mm
Conveyor Width	33.5"	851 mm
Overall Length	90.77"	2306 mm
Height with 10" (254 mm) legs	38.41"	976 mm
Height with 19" (483 mm) legs	47.41"	1204 mm
Depth	59.35"	1507 mm
Weight (w/base & crated)	1572 lb	713 kg
Weight (no base & crated)	1242 lb	563 kg

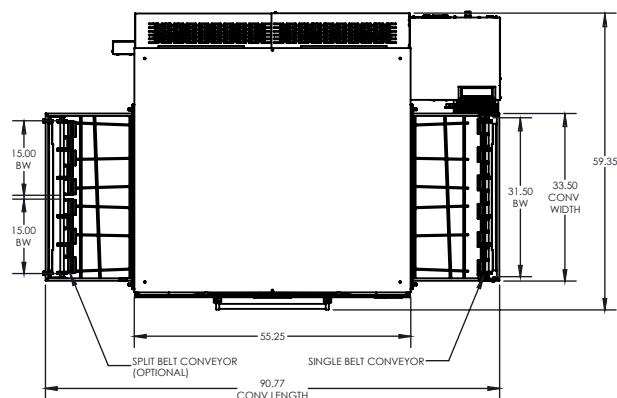


X55 Top View – Gas Single Unit

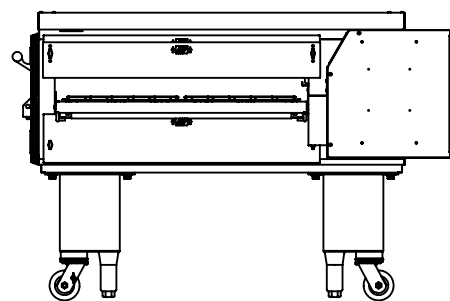


X55 Side View – Gas Single Unit

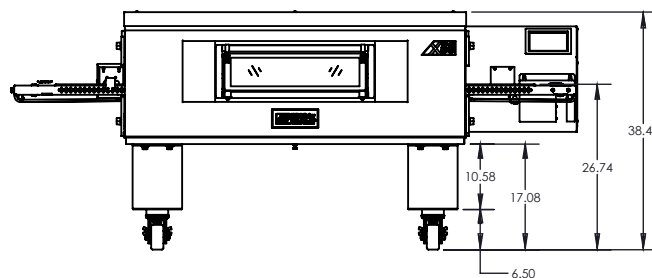


X55 Front View – Gas, 10" Legs Single Unit

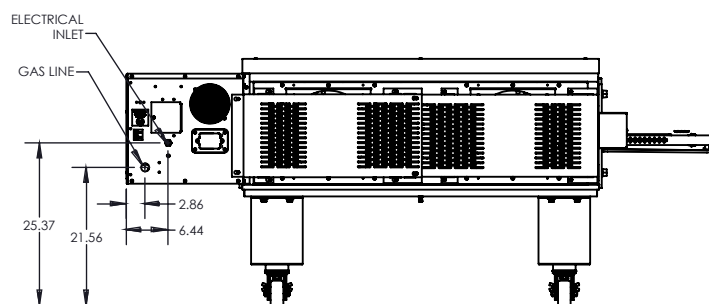

X55 Back View – Gas, 10" Legs Single Unit

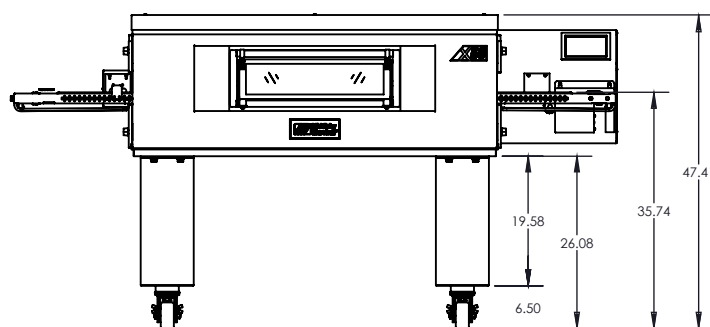

X55 Front View – Gas, 19" Legs Single Unit

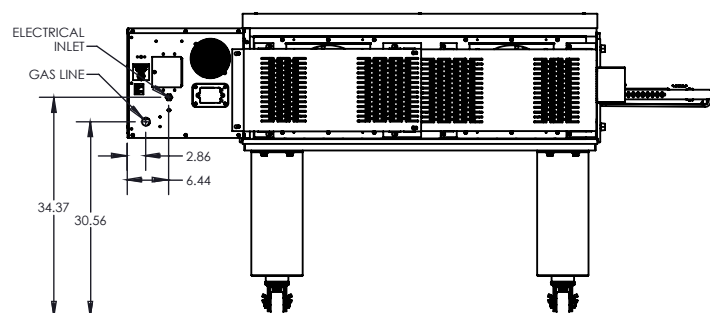

X55 Back View – Gas, 19" Legs Single Unit

* Height dimensions are shown for standard leg extensions. Customer-specific leg extensions will affect these dimensions. All units are shown with casters. CE-approved ovens use 6" (152 mm) adjustable feet instead of casters.


X55

GAS CONVEYOR OVEN


DIMENSIONS

Double Stack Units


Heating Zone	55"	1397 mm
Baking Area	24.4 ft ²	2.3 m ²
Belt Length	90.77"	2306 mm
Belt Width	31.5"	800 mm
Conveyor Width	33.5"	851 mm
Overall Length	90.77"	2306 mm
Height with 10" (254 mm) legs	56.5"	1435 mm
Height with 19" (483 mm) legs	65.5"	1664 mm
Depth	59.35"	1507 mm

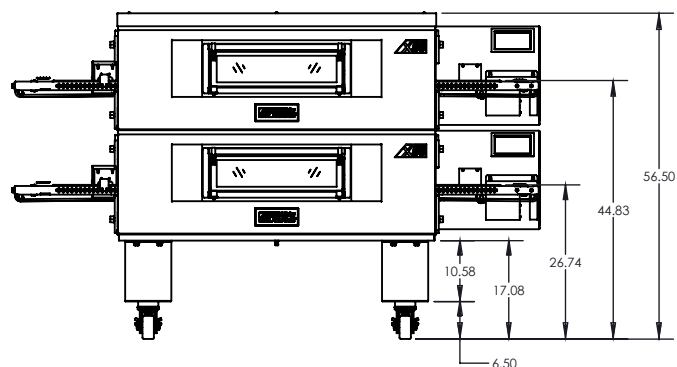


X55 Front View – Gas, 10" Legs Double Unit

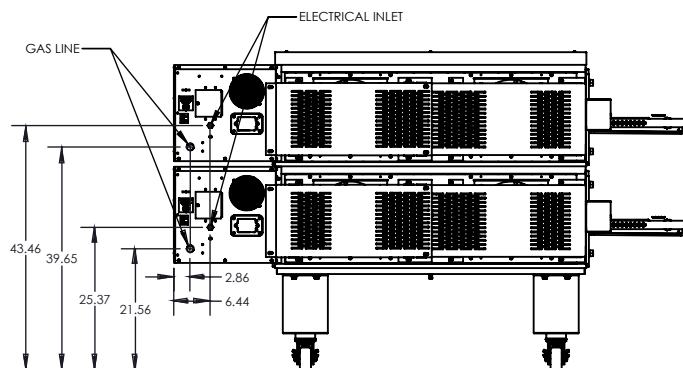

X55 Back View – Gas, 10" Legs Double Unit

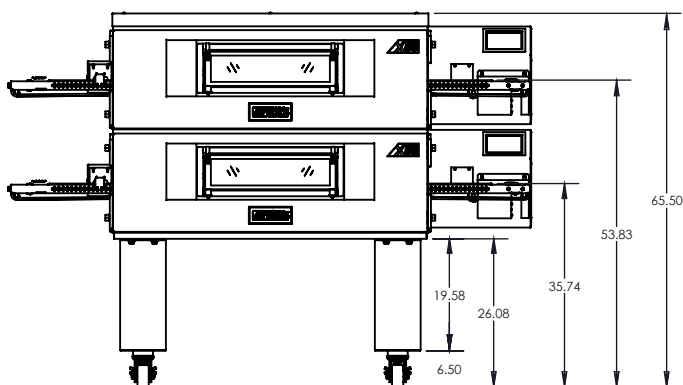

X55 Front View – Gas, 19" Legs Double Unit

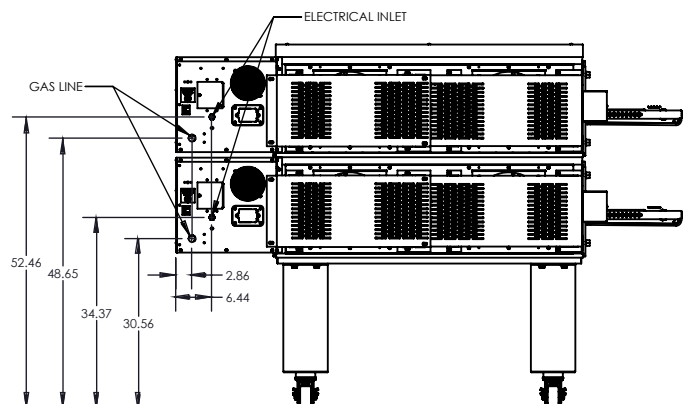

X55 Back View – Gas, 19" Legs Double Unit


* Height dimensions are shown for standard leg extensions. Customer-specific leg extensions will affect these dimensions. All units are shown with casters. CE-approved ovens use 6" (152 mm) adjustable feet instead of casters.

X55


DIMENSIONS

Triple Stack Units on 4" legs


Heating Zone	55"	1397 mm
Baking Area	36.6 ft ²	3.4 m ²
Belt Length	90.77"	2306 mm
Belt Width	31.5"	800 mm
Conveyor Width	33.5"	851 mm
Overall Length	90.77"	2306 mm
Height	68.58"	1742 mm
Depth	59.35"	1507 mm

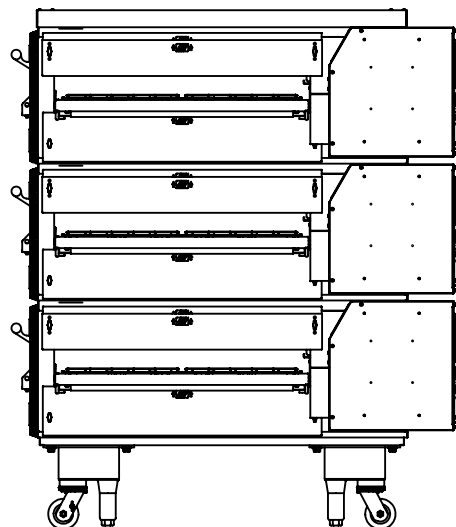

X55 Side View – Gas Triple Unit

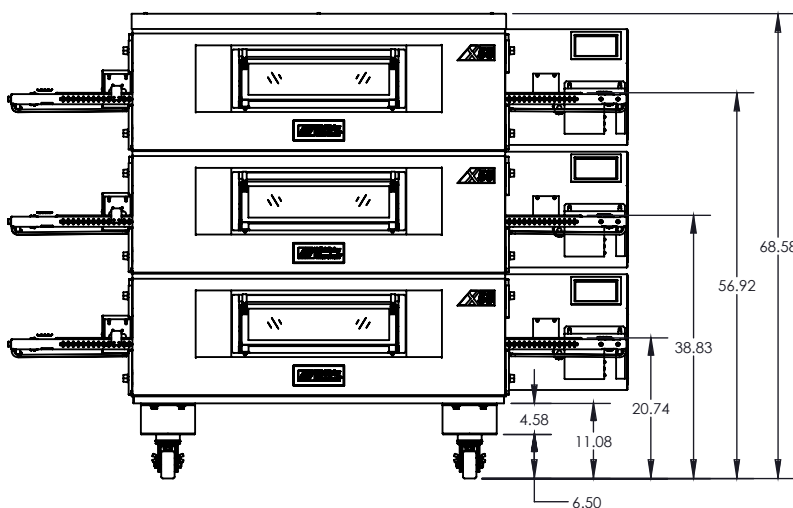

X55 Front View – Gas, Triple Unit

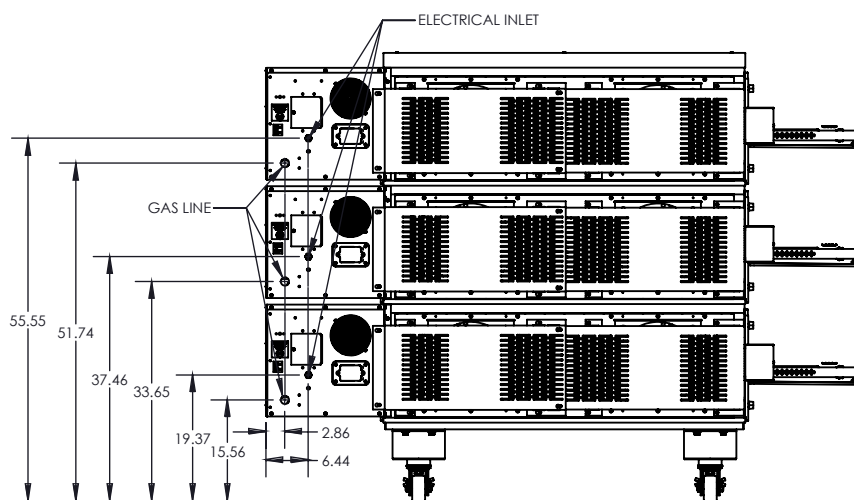

X55 Back View – Gas, Triple Unit

* Height dimensions are shown for standard leg extensions. Customer-specific leg extensions will affect these dimensions. All units are shown with casters. CE-approved ovens use 6" (152 mm) adjustable feet instead of casters.


X55

Gas Conveyor Oven


DIMENSIONS

Triple Stack Units on casters


Heating Zone	55"	1397 mm
Baking Area	36.6 ft ²	3.4 m ²
Belt Length	90.77"	2306 mm
Belt Width	31.5"	800 mm
Conveyor Width	33.5"	851 mm
Overall Length	90.77"	2306 mm
Height	61.60"	1565 mm
Depth	59.35"	1507 mm

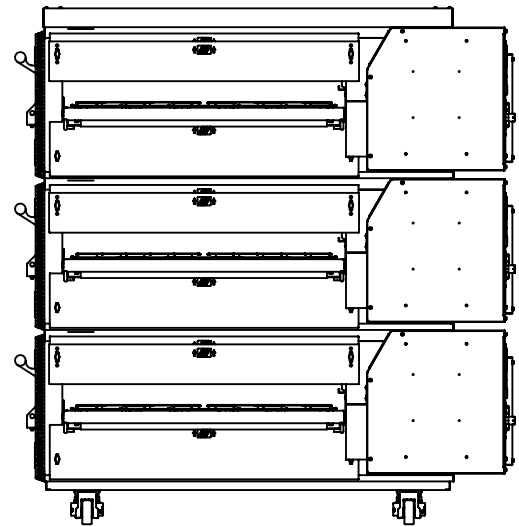

X55 Side View – Gas Triple Unit

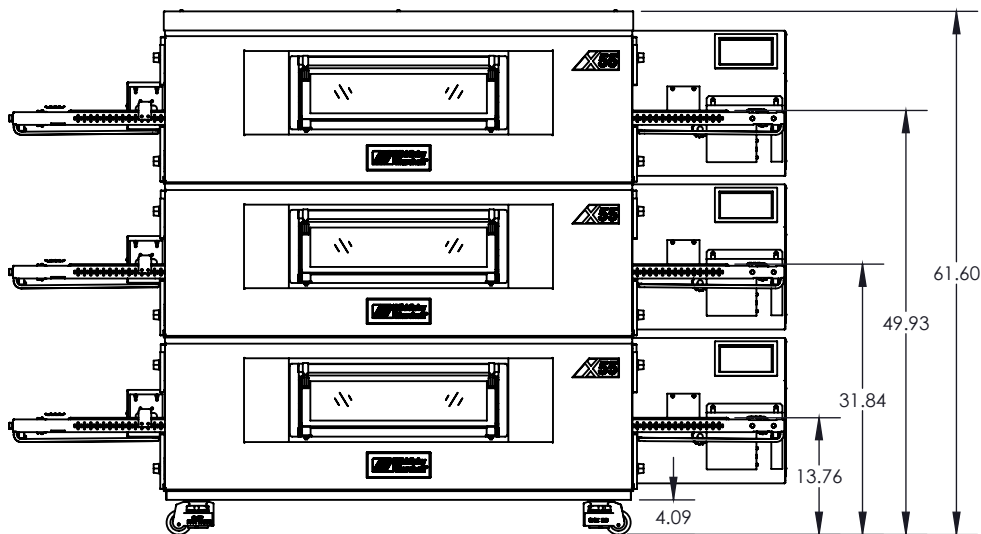

X55 Front View – Gas, Triple Unit

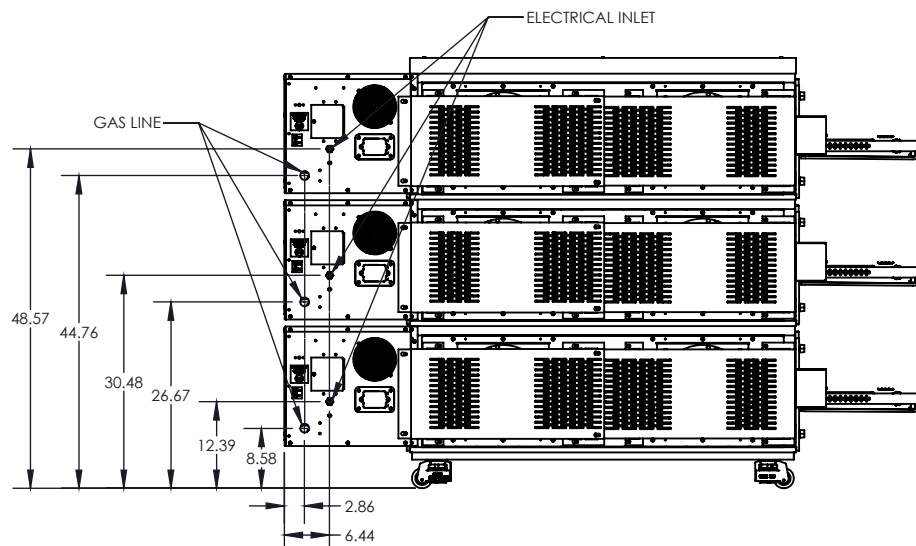

X55 Back View – Gas, Triple Unit



X55

Gas Conveyor Oven

ELECTRICAL SPECIFICATIONS

Voltage	208/240 V
Phase	1
Frequency	50/60 Hz
Current Draw**	15A/13A
Supply	3-wire (2L)
Breakers	As per local code
Cord/Plug (Domestic Only)	6 ft cord with NEMA# L6-20P plug. Customer to provide NEMA# L6-20R receptacle.

NATURAL GAS SPECIFICATIONS

Supply (Inlet) Pressure	6-12" W.C. (14.9-29.9 mbar)
Manifold Pressure (Domestic)	3.5" W.C. (8.7 mbar)
Manifold Pressure (Australia)	3.0" W.C. (7.5 mbar)
Rated Heat Input	140,000 BTU/HR (41.03 kWh) (147.7 MJ/h)

PROPANE GAS SPECIFICATIONS

Supply (Inlet) Pressure	11-14" W.C. (27.4-34.8 mbar)
Manifold Pressure	6" W.C. (14.9 mbar)
Rated Heat Input	140,000 BTU/HR (41.03 kWh) (147.7 MJ/h)

** The current draw rating shown above are maximum values for normal operation, amperage draw will be less than the listed value.
The required gas supply pressures of other locations are dependent on the local gas type and on all applicable local codes.

Minimum Gas Pipe Sizes:

Natural Gas - 2" (50.8 mm) main supply line. One 3/4" (19mm) NPT branch per oven cavity with individual full-flow shutoff valve.

Propane Gas - 2" (50.8 mm) main supply line. One 3/4" (19mm) NPT branch per oven cavity with individual full-flow shutoff valve.

NOTE: Each domestic oven includes (1) 3/4"(19mm)NPT x 48"(1219mm) flexible, vinyl coated gas hose (EXCEPT for CE Countries), (1) Full-flow manual shut off valve, (1) Tap and adapter assembly, with pressure gauge.