

428

Frozen Beverage Freezer

Single Flavor



Shown with optional top air discharge chute

Features

Vary your menu by offering shakes & smoothies or frozen cocktails, fruit juices, coffees, cappuccino and tea slush beverages, all served at the desired thickness. Optimized refrigeration system offers efficient operation in an extremely quiet, compact, self-contained freezer.

Freezing Cylinder

One, 7 quart (6.6 liter).

Mix Hopper

One, 20 quart (18.9 liter). Refrigerated to maintain mix below 41°F (5°C). Approved for dairy and non-dairy products.

Indicator Lights

Add Mix light alerts the operator to add mix. When the Mix Out light flashes, the unit automatically shuts down to prevent damage.

Automatic Consistency Control

A specially designed viscosity control automatically maintains superior product quality. An adjustable control allows the operator to serve a wide variety of frozen beverages at the desired thickness.

Standby

During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

Freezer Door

Clear, plastic door merchandises product in the making. Dispensing is quick and easy with a simple movement of the draw handle.


Lighted Display

Self-merchandising lighted display backlights the appropriate static cling and downlights the dispensing door. Five static clings are included: Frozen Cappuccino, Frozen Drinks, Margaritas, Shakes, and Smoothies. Lighted area is 5.25" (133.5 mm) high by 11.641 (295.7 mm) wide, with .250" (6.3 mm) radius corners.

Air Filter

Removable, cleanable and reusable air filter keeps the condenser clean for optimal refrigeration system performance.



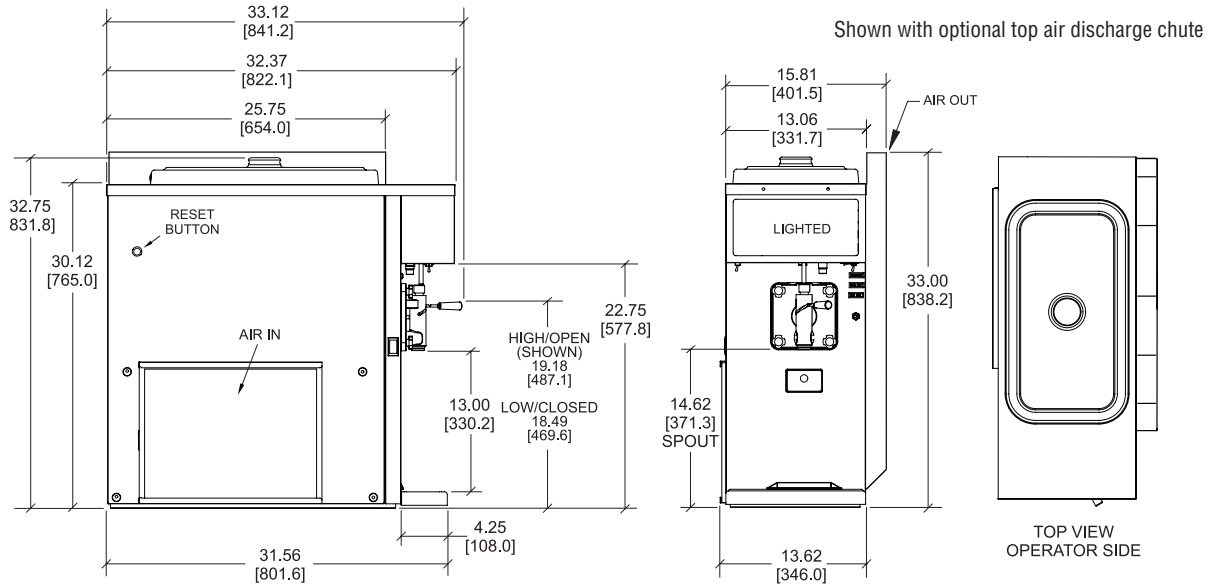

OTE: FIGURES IN PARENTHESES INDICATE MILLIMETERS. / ALL DIMENSIONS PLUS OR MINUS 1/16 inch [1.5mm].

Weights	lbs.	kgs.
Net	221	100.2
Crated	265	120.2
	cu. ft.	cu. m.
Volume	27.8	0.79
Dimensions	in.	mm.
Width	13-5/8	346
Depth	32-3/8	822
Height	32-3/4	832
Counter Clearance	*	*

* Designed to rest on a plastic pad directly on a counter top.

Electrical	Total Amps	Supplied with NEMA Cord
115/60/1 Air	13.0	5-20p
208-230/60/1 Air	10.0	-----
220-240/60/1 Air	8.0	-----

This unit may be manufactured in other electrical characteristics. Refer to the local Taylor Distributor for availability.
(For exact electrical information and approval marks, always refer to the data label of the unit.)

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
 Neutral: Yes No Cooling: Air Water NA
 Options: _____

Authorized Taylor Distributor

Specifications

Electrical

One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be cord connected. Consult the international Taylor distributor for cord & receptacle specifications for 50 Hz. equipment.

Refrigeration System

One, approximately 3,600 BTU/hr compressor. R404A. (BTUs may vary depending on compressor used.)

Beater Motor

One, 1/2 HP.

Air Cooled

Minimum Clearance: 3" (76 mm) on the left side, and 0" clearance on the rear/right side when the top air discharge chute is employed. It is recommended to place the rear of the unit against the wall. Minimum air clearances must be met to assure adequate air flow for optimum performance.

Options

- Air Discharge Chute - Minimum air clearance 3" (7.6 cm) on left side. No clearance required on right side and rear.
- Panel Spinner
- Cart with casters

C201 Cart Weights (C20100-WKR):

Net: 150 lbs. (68.0 kg) Crated: 171 lbs. (77.6 kg) 14.5 cu. ft. (0.41 cu. m.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.



750 N. Blackhawk Blvd.
 Rockton, Illinois 61072
www.taylor-company.com