



*Take the Lead*


# Ice Machines

Under Counter  
Modular  
Flake & Nugget  
Storage Bins  
Dispensers  
Water Filters




## ICE TYPE


### BELL/GOURMET



### CUBE



### HALF CUBE




### FLAKE



### NUGGET



## MODEL NUMBERS

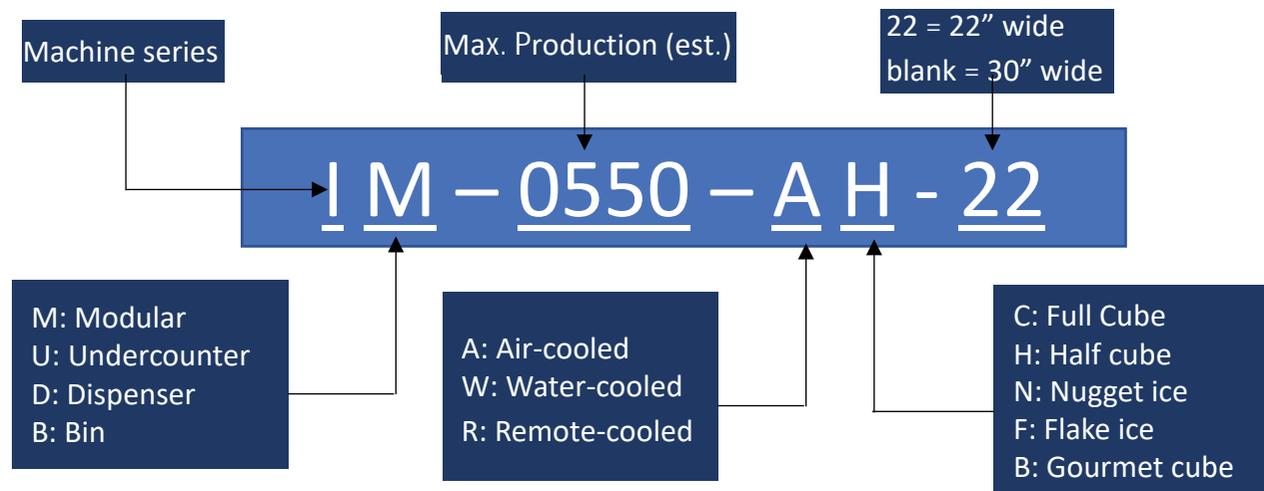

## COMMERCIAL WARRANTY

### Ice Machines - Undercounter, Modulars

- 3 Years Parts & Labor
- 5 Years Parts & Labor for evaporator
- 5 Years Parts & 3 Years Labor for compressor

### Ice storage bins

- 3 Years Parts & Labor

### Ice machines - Flake/Nugget, Ice/Water Dispensers, Hotel Dispensers




- 3 Years Parts & Labor
- 5 Years Parts & 3 Years Labor for compressor

### \* Residential Warranty: all Ictro equipment, if installed in residential area

- 1 Year Parts & Labor

(effective 02/01/2023)

# UNDER COUNTER AIR COOLED



## IU-0070

\* Replaces WU-0070

MODEL	STORAGE CAPACITY	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
	lbs	inch	lbs (Net / Shipping)	
IU-0070-OU IU-0070-AG	26	15 x 25 x 34	104 / 119	GOURMET/ BELL
CONDENSER	ELECTRICAL OPTIONS	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	115 V/60 Hz/1 Ph	11.15	55 lbs	47 lbs
		12.7		

Optional drain pump kit: IPK-61B (DC motor drain pump kit)



## WU-0100

MODEL	STORAGE CAPACITY	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
	lbs	inch	lbs (Net / Shipping)	
WU-0100-AC	27	21 x 23 x 34.7	110 / 115	CUBE
CONDENSER	ELECTRICAL OPTIONS	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	115 V/60 Hz/1 Ph	9.39	105 lbs	82 lbs

\* FWU-0100R: Replacement water Filter (1 unit included)

A filter is required for this machine to operate. If your machine stops producing ice, it is likely time to replace the filter.



## IU-0170

MODEL	STORAGE CAPACITY	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
	lbs	inch	lbs (Net / Shipping)	
IU-0170-AC IU-0170-AH	77	26 x 28 x 39	154 / 183	CUBE HALF CUBE
CONDENSER	ELECTRICAL OPTIONS	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	115 V/60 Hz/1 Ph	8.62	175 lbs	140 lbs





## IU-0220

MODEL	STORAGE CAPACITY	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
	lbs	inch	lbs (Net / Shipping)	
IU-0220-AC IU-0220-AH	77	26 x 28 x 39	154 / 183	CUBE HALF CUBE
CONDENSER	ELECTRICAL OPTIONS	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	115 V/60 Hz/1 Ph	8.62	202 lbs	150 lbs

# MODULAR (30")

## AIR COOLED



### IM-0350

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Gross)	
IM-0350-AC	IB-033 / IB-044	30 x 24.8 x 22.6	152.1 / 171	CUBE
IM-0350-AH				HALF CUBE
CONDENSER	ELECTRICAL OPTIONS	Power (kWh / 100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	115 V/60 Hz/1 Ph	6.25	367 lbs	304 lbs

### IM-0460

\* Replace WM-0460

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Gross)	
IM-0460-AC	IB-033 / IB-044	30 x 24.8 x 22.6	162.3 / 184	CUBE
IM-0460-AH				HALF CUBE
CONDENSER	ELECTRICAL OPTIONS	Power (kWh / 100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	115 V/60 Hz/1 Ph	5.43	444 lbs	376 lbs



### IM-0550

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Gross)	
IM-0550-AC	IB-033 / IB-044	30 x 24.8 x 22.6	162.3 / 189	CUBE
IM-0550-AH				HALF CUBE
CONDENSER	ELECTRICAL OPTIONS	Power (kWh / 100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	115 V/60 Hz/1 Ph	5.91	551 lbs	399 lbs

### IM-0750

\* Replaces WM-0680 & IM-0680

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Gross)	
IM-0750-AC	IB-033 / IB-044 / IB-M900-48	30 x 24.8 x 22.6	185.2 / 218	CUBE
IM-0750-AH				HALF CUBE
CONDENSER	ELECTRICAL OPTIONS	Power (kWh / 100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	208~230 V/60 Hz/1 Ph	5.59	737 lbs	584 lbs



### IM-1100

\* Replaces WM-1100

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Gross)	
IM-1100-AC	IB-044 / IB-M900-48	30 x 24.8 x 30.3	231.5 / 262	CUBE
IM-1100-AH				HALF CUBE
CONDENSER	ELECTRICAL OPTIONS	Power (kWh / 100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	208~230 V/60 Hz/1 Ph	4.99	1106 lbs	875 lbs



# MODULAR (30") WATER COOLED



## IM-0460

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Gross)	
IM-0460-WC	IB-033 / IB-044	30 x 24.8 x 22.6	162.3 / 192	CUBE
IM-0460-WH				HALF CUBE
CONDENSER	ELECTRICAL	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Water Cooled	115 V/60 Hz/1 Ph	4.56	463 lbs	407 lbs

## IM-0550



MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Gross)	
IM-0550-WC	IB-033 / IB-044	30 x 24.8 x 22.6	162.3 / 192	CUBE
IM-0550-WH				HALF CUBE
CONDENSER	ELECTRICAL	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Water Cooled	115 V/60 Hz/1 Ph	4.53	547 lbs	483 lbs



## IM-1100

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Gross)	
IM-1100-WC	IB-044 / IB-M900-48	30 x 24.8 x 30.3	231.5 / 255	CUBE
IM-1100-WH				HALF CUBE
CONDENSER	ELECTRICAL	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Water Cooled	208~230 V/60 Hz/1 Ph	4.13	1036 lbs	1004 lbs

# MODULAR (30") REMOTE AIR COOLED



## IM-1100

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Shipping)	
IM-1100-RC	IB-044 / IB-M900-48	30 x 24.8 x 30.3	231.5 / 255	CUBE
IM-1100-RH				HALF CUBE
CONDENSER	ELECTRICAL	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Remote Air Cooled	208~230 V/60 Hz/1 Ph	4.72	1081 lbs	949 lbs

## Condensing Unit (pre-charged)



MODEL	ELECTRICAL	DIMENSION (WxDxH)	WEIGHT
		inch	lbs (Net / Shipping)
IRC-1100	wired to machine head (50' power cable included with each line-set)	22.6 x 35.6 x 27.1	80 / 105



## Tubing (pre-charged)



IRT-20R404A (20ft with Quick connects)  
IRT-35R404A (35ft with Quick connects)  
IRT-50R404A (50ft with Quick connects)

# MODULAR (22")

## AIR COOLED



### IM-0350-22

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Shipping)	
IM-0350-AC-22	IB-026-22 / IB-033	22 x 24.8 x 22.6	143.3 / 168	CUBE
IM-0350-AH-22				HALF CUBE
CONDENSER	ELECTRICAL	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	115 V/60 Hz/1 Ph	6.27	394 lbs	346 lbs

### IM-0460-22

\* Replaces WM-0460-22



MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Shipping)	
IM-0460-AC-22	IB-026-22 IB-033/ IB-044	22 x 24.8 x 22.6	143.3 / 168	CUBE
IM-0460-AH-22				HALF CUBE
CONDENSER	ELECTRICAL	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	115 V/60 Hz/1 Ph	6.21	443 lbs	367 lbs

### IM-0550-22

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Shipping)	
IM-0550-AC-22	IB-026-22 IB-033 / IB-044	22 x 24.8x 22.6	143.3 / 171	CUBE
IM-0550-AH-22				HALF CUBE
CONDENSER	ELECTRICAL	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	115 V/60 Hz/1 Ph	6.08	508 lbs	442 lbs





22" Modular shown with IB-026-22



30" Modular shown with IB-033

# MODULAR (48")



## AIR COOLED



### IM-1700, IM-2000

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Shipping)	
IM-1700-AC	IB-085-48, Kloppenberg	48 x 24.5 x 30.4	322 / 366	CUBE
IM-1700-AH				HALF CUBE
CONDENSER	ELECTRICAL	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	208~230 V/60 Hz/1 Ph	4.66	1722 lbs	1446 lbs

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Shipping)	
IM-2000-AC	IB-085-48, Kloppenberg	48 x 24.5 x 30.4	322 / 366	CUBE
IM-2000-AH				HALF CUBE
CONDENSER	ELECTRICAL	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	208~230 V/60 Hz/1 Ph	4.24	2032 lbs	1708 lbs

## WATER COOLED



### IM-1700, IM-2000

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Shipping)	
IM-1700-WC	IB-085-48, Kloppenberg	48 x 24.5 x 30.4	311 / 379	CUBE
IM-1700-WH				HALF CUBE
CONDENSER	ELECTRICAL	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Water Cooled	208~230 V/60 Hz/1 Ph	2.95	1843 lbs	1678 lbs

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Shipping)	
IM-2000-WC	IB-085-48, Kloppenberg	48 x 24.5 x 30.4	322 / 366	CUBE
IM-2000-WH				HALF CUBE
CONDENSER	ELECTRICAL	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Water Cooled	208~230 V/60 Hz/1 Ph	4.24	2032 lbs	1708 lbs

## REMOTE



### IM-1700, IM-2000

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Shipping)	
IM-1700-RC	IB-085-48, Kloppenberg	48 x 24.5 x 30.4	322 / 366	CUBE
IM-1700-RH				HALF CUBE
CONDENSER	ELECTRICAL	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	208~230 V/60 Hz/1 Ph	4.44	1680 lbs	1462 lbs

MODEL	STORAGE BIN OPTION	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
		inch	lbs (Net / Shipping)	
IM-2000-RC	IB-085-48, Kloppenberg	48 x 24.5 x 30.4	322 / 366	CUBE
IM-2000-RH				HALF CUBE
CONDENSER	ELECTRICAL	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled	208~230 V/60 Hz/1 Ph	4.04	1980 lbs	1730 lbs



### Condensing Unit (pre-charged)

MODEL	ELECTRICAL	DIMENSION (WxDxH)	WEIGHT
		inch	lbs (Net / Shipping)
IRC-2000	wired to machine head (50' power cable included with each line-set)	22.6 x 35.6 x 27.1	143 / 195

### Tubing (pre-charged)



IRT-20R410A (20ft with Quick connects)  
IRT-35R410A (35ft with Quick connects)  
IRT-50R410A (50ft with Quick connects)

# FLAKE & NUGGET 22" MODULAR



IM-0770-AN  
shown with IB-026-22

## IM-0770

MODEL	STORAGE BIN OPTIONS	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE	
		inch	lbs (Net / Shipping)		
IM-0770-AF	IB-026-22 / IB-033 / IB-044 / IB-085-48	22 x 25 x 26	174 / 207	FLAKE	
IM-0770-AN				NUGGET	
CONDENSER		ELECTRICAL	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled		115 V/60 Hz/1 Ph	5.18 / 5.43	760 / 717 lbs	556 / 556 lbs

- ✓ 22" SLIM DESIGN
- ✓ ADOPTED SLEEVE BEARING FOR HYGIENE IMPROVEMENT

# NUGGET UNDER COUNTER



## IU-0090

	STORAGE CAPACITY	DIMENSION (WxDxH)	WEIGHT	ICE SHAPE	
	lbs	inch	lbs (Net / Gross)		
IU-0090-AN IU-0090-ANP*	24.3	15 x 22 x 34	112 / 187	NUGGET	
CONDENSER		ELECTRICAL	Power (kWh/100 lbs ice)	Air / Water 70°F / 50°F	Air / Water 90°F / 70°F
Air Cooled		115 V/60 Hz/1 Ph	10.58	91 lbs	67 lbs

\*IU-0090-ANP version comes with integrated drain pump

# SNOW FLAKE



## IS-0700

MODEL	PRODUCTION CAPACITY (MILK)	PRODUCTION CAPACITY (WATER)	STORAGE CAPACITY	
	lbs	lbs	gal	
IS-0700-AS	1091	705	14	
CONDENSER		ELECTRICAL	DIMENSION (WxDxH)	WEIGHT
Air Cooled		208~230 V/60 Hz/1 Ph	inch 21 x 30 x 56	lbs (Net / Shipping) 335 / 392

- ✓ ADOPTED THE FREEZE CYCLE APPLIED ON SOFT ICE CREAM FREEZER
- ✓ BEST DESIGN FOR HYGIENE IMPROVEMENT & EASY MAINTENANCE
- ✓ WORLD STANDARD OF SNOW FLAKE ICE MACHINE

# ICE STORAGE BIN



## IB-026-22

MODEL	APPLICABLE	STORAGE CAPACITY	DIMENSION (WxDxH)	WEIGHT
		lbs	inch	lbs (Net / Shipping)
IB-026-22	IM-0350-22 IM-0460-22 IM-0550-22 IM-0770	265	22 x 34 x 38 (Without legs)	99 / 113



## IB-033

MODEL	APPLICABLE	STORAGE CAPACITY	DIMENSION (WxDxH)	WEIGHT
		lbs	inch	lbs (Net / Shipping)
IB-033	IM-0350/22 IM-0460/22 IM-0550/22 IM-0680 IM-0750 IM-0770	350	30 x 34 x 38 (Without legs)	121 / 140

※ Bin top adapter needed to use 22" Ice Machine Head  
 1) IBT-2230R: 8" Bin Top Adapter to left mount 22" Head on IB-033  
 2) IBT-2230BV: (2) 4" Bin Top Adapter to center mount 22" Head on IB-033



## IB-044

MODEL	APPLICABLE	STORAGE CAPACITY	DIMENSION (WxDxH)	WEIGHT
		lbs	inch	lbs (Net / Shipping)
IB-044	IM-0460/22 IM-0550/22 IM-0680 IM-0750 IM-0770 IM-1100	440	30 x 34 x 46 (Without legs)	143 / 167

※ Bin top adapter needed to use 22" Ice Machine Head  
 1) IBT-2230R: 8" Bin Top Adapter to left mount 22" Head on IB-033  
 2) IBT-2230BV: (2) 4" Bin Top Adapter to center mount 22" Head on IB-033



## IB-085-48

MODEL	APPLICABLE	STORAGE CAPACITY	DIMENSION (WxDxH)	WEIGHT
		lbs	inch	lbs (Net / Shipping)
IB-085-48	IM-0750 IM-1100 IM-1700 IM-2000	816	48.4 x 33 x 48.8	143 / 195

※ When placing 22" or 30" units on bin, use IBT-2248B and IBT-3048B bin adapter kits.



## Follett Bins

MODEL	APPLICABLE	STORAGE CAPACITY	DIMENSION (WxDxH)	WEIGHT
		lbs	inch	lbs (Shipping)
IB-SG1010S-48	All models	1000	48 x 56 x 31	268
IB-SG1300S-48		1320	48 x 65 x 31	277
IB-SG1650S-60		1660	60 x 65 x 31	340

# ICE / WATER DISPENSER



ID-0300-AN

## ID-0160



MODEL	STORAGE CAPACITY		DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
	lbs		inch (without foot)	lbs (Net / Gross)	
ID-0160-AN	5.3		13.8 x 23.8 x 24.8	106 / 112.	NUGGET
CONDENSER	ELECTRICAL OPTIONS	Power (kWh / 100 lbs ice)	Air / Water 21°C(70°F) / 10°C(50°F)	Air / Water 32°C(90°F) / 21°C(70°F)	
Air Cooled	115V/60Hz/1Ph	6.5	160 lbs	106 lbs	

## ID-0300



MODEL	STORAGE CAPACITY		DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
	lbs		inch (without foot)	lbs (Net / Gross)	
ID-0300-AN	11		16.6 x 25 x 27.9	145.5 / 178	NUGGET
CONDENSER	ELECTRICAL OPTIONS	Power (kWh / 100 lbs ice)	Air / Water 21°C(70°F) / 10°C(50°F)	Air / Water 32°C(90°F) / 21°C(70°F)	
Air Cooled	115V/60Hz/1Ph	6.5	282 lbs	206 lbs	

## ID-0450



MODEL	STORAGE CAPACITY		DIMENSION (WxDxH)	WEIGHT	ICE SHAPE
	lbs		inch (without foot)	lbs (Net / Gross)	
ID-0450-AN	30		16.6 x 26.5 x 43.1	203 / 223	NUGGET
CONDENSER	ELECTRICAL OPTIONS	Power (kWh / 100 lbs ice)	Air / Water 21°C(70°F) / 10°C(50°F)	Air / Water 32°C(90°F) / 21°C(70°F)	
Air Cooled	115V/60Hz/1Ph	7.28	378 lbs	289 lbs	

※ Design and Specification are subject to change without notice

# HOTEL / MOTEL ICE DISPENSER



 ADA compliant for Ice dispensing



## ID-H150

MODEL	STORAGE CAPACITY lbs	DIMENSION (WxDxH) inch (with 6" legs)	WEIGHT lbs (Net / Gross)
ID-H150-22	141	22.5" x 33.3" x 51.5"	187 / 209

\* IBO-HDWKIT: option kit for water supply



## ID-H250

MODEL	STORAGE CAPACITY lbs	DIMENSION (WxDxH) inch (with 6" legs)	WEIGHT lbs (Net / Gross)
ID-H250-30	247	30" x 33.3" x 51.5"	207 / 229

\* IBO-HDWKIT: option kit for water supply



ID-H150-22 shown with IM-0550-AH-22  
(Ice machine sold separately)



ID-H250-30 shown with IM-0550-AH  
(Ice machine sold separately)

# ICEPRO SERIES WATER TREATMENT



ICETRO America utilize the IcePro water treatment systems in providing with pre-filtration to all of our systems as well as controlling scales with a patent blend called Cityryne\*. The IcePro series is a complete system without the need to add additional pre-filtration or scale control.

	Description	Flow Rate	Fittings
IcePro 500	Ice makers up to 500 lbs	1.67 GPM	3/8" FNPT
IcePro 1200	Ice makers up to 1100 lbs	2.00 GPM	3/8" FNPT
IcePro 2550	Ice makers up to 2500 lbs.	3.00 GPM	3/8" FNPT
IcePro Pure	Ice/Water Dispensers	1.67 GPM	3/8" FNPT



IcePro 500  
(replaces IcePro 400)



IcePro 1200  
(replaces IcePro 800/1300)



IcePro 2550  
(replaces IcePro 2500)



IcePro Pure  
(replaces IcePro DIS)



1202 W Struck Ave, Orange, CA 92867  
Tel: (714) 215- 4864

6432 Warren Drive, Norcross, GA 30093  
Tel: (470) 567 - 8603

Website: [www.icetroamerica.com](http://www.icetroamerica.com)  
e-mail: [icetro@icetroamerica.com](mailto:icetro@icetroamerica.com)  
Service call: (470) 567 - 8693

Distributed by :

